

**TECHNIQUE INFORMATION
DIESEL GENERATORS
GSG ALFA DIESEL ENGINE POWERED**




ALFA			GSG - C1124	
Standby Power	kVA	1124	Engine Speed	Power Factor
	kW	899,2	1500 rpm	0,8 Cos Phi
Prime Power	kVA	1028	Voltage	
	kW	822,4	400 / 230 V	

ENGINE


FUEL CONSUMPTION (lt/h)

Brand	CUMMINS	%110 ESP	228
Power PRP	880	%100 PRP	209
Model	KTA38-G14	%75 PRP	161
N° of Cylinders / Valves	12	%50 PRP	113
Engine Type	4	(The specific gravity is 0.84 and the fuel is considered to be BS2869, Class A2.)	
Displacement	37,8		
Aspiration	Turbocharge and Aftercooler System		
Bore x Stroke	159X159		
Compression Ratio	13.9:1		
Air Filter	Heavy Duty		
Cooling Method	Water Cooled (water + %50 antifreeze)		
Total Coolant Capacity	210		
Governor Type	Electronic		
Electrical System	24VDC		
Battery Charger Current	35		
Oil Capacity	135		
Exhaust Gas Temp.	3,021		
Air Flow PRP	≤499		
Cooling Air Flow PRP	1,14		
Starter Power	13,97		
Starter Power	TBA		
Standard Battery Voltage	24 VDC		
Standard Battery Capacity	4x105Ah		
Standard Battery Type	Maintenance-Free Lead Acid		

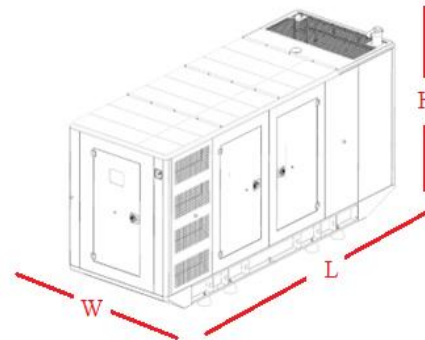

ALTERNATOR

Brand	STAMFORD
Model	S6L1D-E
Voltage	400 /230 VAC
Number of Phase	3
Power Factor	0,8
Number of Poles	4
Connection Type	Star
Bearing	Single
Insulation Class	H
Protection Class	IP 23
Winding	2/3
Control System	Self Excited
Voltage Regulator	Electronic AVR
Efficiency 4/4 400VAC 50Hz	(cosφ=1) 96,2
Voltage Regulation	±%1
THD	<%5
Apparent Power [kVA] Prime 400VAC 50Hz	1050
	125°C/40°C

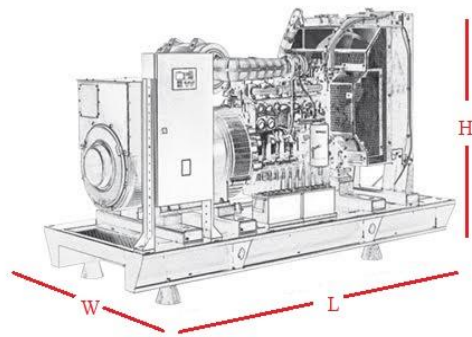


OPEN VERSION					CANOPY VERSION			
Width(mm)	Length(mm)	Height(mm)	Dry Weight (kg)	Fuel Tank Capacity (lt.)	Width(mm)	Length(mm)	Height(mm)	Dry Weight (kg)
2020	4290	2311	TBA	1500	2370	5960	2611*	TBA

**TECHNIQUE INFORMATION
DIESEL GENERATORS
GSG ALFA DIESEL ENGINE POWERED**



- * Diesel and gas genset support
- * 400Hz operation support
- * Downloadable languages
- * Harmonic analysis of V & I
- * Weekly operation schedule
- * Dual mutual standby with equal aging of gensets
- * Overload IDMT protection
- * Current unbalance protection
- * Fuel filling & fuel theft alarms
- * Battery back-up real time clock

- * Idle speed control
- * Contactor & MCB drive
- * Fuel filling counters
- * Fuel consumption counter
- * Automatic GSM geo-location
- * Reverse power protection
- * Free configuration program
- * Mobile genset support
- * 3 level configuration password
- * IP65 rating with optional gasket

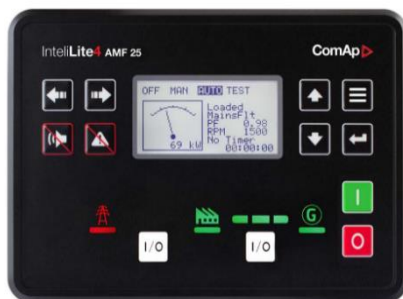

- * Full remote communications support (AirGate 2.0, WSV)
- * Internet access using Ethernet / 4G, Modbus TCP/RTU
SNMP v1/v2c
- * Active SMS and emails
- * Detailed history log with up to 350 records
- * Dual Mutual Standby application support
- * Remote display
- * User setpoints and protections
- * 5 languages in the controller & Translator functionality
- * User Access Management
- * Cyber security improvement
- * Alternative configurations
- * Multi-purpose schedulers
- * Modbus register mapping possibility

- * Stand-by and prime-power application in one unit
 - * Backlit symbols
 - * 8 binary outputs, 8 + 1 binary inputs, 4 analog inputs (U/I/R)
 - * +5 V output reference for analog inputs
 - * 2 high-current E-Stop binary outputs
 - * USB Host
 - * Inbuilt RS485
 - * 2 slots for extension plug-in modules (Modbus, Internet, SMS, inputs/outputs)
 - * Extension CAN modules
 - * ECU support (Tier 4 Final, Stage V)
 - * RTC with battery back-up (full calendar)
 - * Power over USB for controller configuration
 - * Zero power mode
 - * True RMS measurement
 - * In-built PLC, complemented with a PLC monitoring tool in IntelliConfig
 - * Load shedding, dummy load management
- User buttons
- * User buttons
 - * Geofencing based on GPS position
 - * Available also in low temperature version (Order code: