

TECHNIQUE INFORMATION
DIESEL GENERATORS
GSG ALFA DIESEL ENGINE POWERED



ALFA			GSG - P250	
------	--	--	------------	--

Standby Power	kVA	250	Engine Speed	Power Factor
	kW	200	1500 rpm	0,8 Cos Phi

Prime Power	kVA	225	Voltage	
	KW	180	400 / 230 V	


ENGINE

Brand	PERKINS
Power PRP	217.2 kW
Model	1206A-E70TTAG2
N° of Cylinders / Valves	6/24
Engine Type	4
Displacement	7.01 lt
Aspiration	Turbocharged - Air cooled
Bore x Stroke	105x135 mm
Compression Ratio	15.8:1
Air Filter	Heavy Duty
Cooling Method	Water Cooled (water + %50 antifreeze)
Total Coolant Capacity	25 lt
Governor Type	ECM (Engine Control Modul)
Electrical System	12VDC
Battery Charger Current	100A
Oil Capacity	16 lt
Exhaust Gas Flow PRP	25,58 [m3/min]
Exhaust Gas Temp.	487,5 [°C]
Air Flow PRP	11,6 [m3/min]
Cooling Air Flow PRP	4,42 [m3/min]
Starter Power	5 kW
Standard Battery Voltage	12VDC
Standard Battery Capacity	1x105Ah
Standard Battery Type	Maintenance-Free Lead Acid

FUEL CONSUMPTION (lt/h)


%110 ESP	56,6
%100 PRP	21
%75 PRP	38
%50 PRP	25,5

(The specific gravity is 0.84 and the fuel is considered to be BS2869, Class A2.)

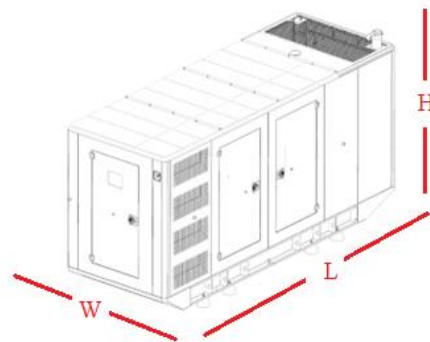


ALTERNATOR

Brand	LINZ
Model	PRO28S C/4
Voltage	400 /230 VAC
Number of Phase	3
Power Factor	0.8
Number of Poles	4
Connection Type	Star
Bearing	Single
Insulation Class	H
Protection Class	IP 23
Winding	5/6
Control System	Self Excited
Voltage Regulator	Electronic AVR
Efficiency 4/4 400VAC 50Hz	93.8 (cosφ=1)
Voltage Regulation	±%1
THD	<%3,1
Apparent Power [kVA] Prime 400VAC 50Hz	240
	125°C/40°C

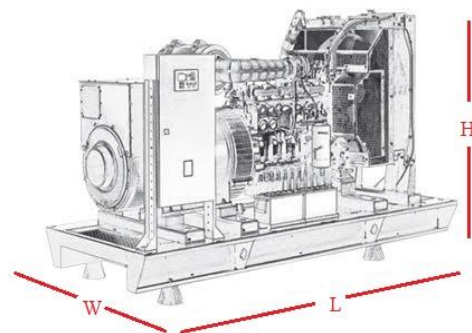

OPEN VERSION					CANOPY VERSION			
Width(mm)	Length(mm)	Height(mm)	Dry Weight (kg)	Fuel Tank Capacity (lt.)	Width(mm)	Length(mm)	Height(mm)	Dry Weight (kg)
1200	3200	1742	1975	460	1260	4094	2063	2658

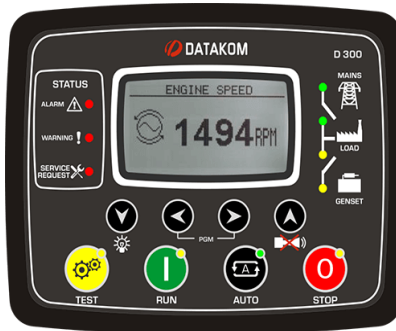

- * Diesel and gas genset support
- * 400Hz operation support
- * Downloadable languages
- * Harmonic analysis of V & I
- * Weekly operation schedule
- * Dual mutual standby with equal aging of gensets
- * Overload IDMT protection
- * Current unbalance protection
- * Fuel filling & fuel theft alarms
- * Battery back-up real time clock

- * Idle speed control
- * Contactor & MCB drive
- * Fuel filling counters
- * Fuel consumption counter
- * Automatic GSM geo-location
- * Reverse power protection
- * Free configuration program
- * Mobile genset support
- * 3 level configuration password
- * Ip65 rating with optional gasket



- * Full remote communications support (AirGate 2.0, WSV)
- * Internet access using Ethernet / 4G, Modbus TCP/RTU
SNMP v1/v2c
- * Active SMS and emails
- * Detailed history log with up to 350 records
- * Dual Mutual Standby application support
- * Remote display
- * User setpoints and protections
- * 5 languages in the controller & Translator functionality
- * User Access Management
- * Cyber security improvement
- * Alternative configurations
- * Multi-purpose schedulers
- * Modbus register mapping possibility

- * Stand-by and prime-power application in one unit
- * Backlit symbols
- * 8 binary outputs, 8 + 1 binary inputs, 4 analog inputs (U/I/R)
- * +5 V output reference for analog inputs
- * 2 high-current E-Stop binary outputs
- * USB Host
- * Inbuilt RS485
- * 2 slots for extension plug-in modules (Modbus, Internet,
SMS, inputs/outputs)
- * Extension CAN modules
- * ECU support (Tier 4 Final, Stage V)
- * RTC with battery back-up (full calendar)
- * Power over USB for controller configuration
- * Zero power mode
- * True RMS measurement
- * In-built PLC, complemented with a PLC monitoring tool in
IntelliConfig
IntelliConfig
- * Load shedding, dummy load management
- User buttons
- * User buttons
- * Geofencing based on GPS position
- * Available also in low temperature version (Order code: