

TECHNIQUE INFORMATION
DIESEL GENERATORS
GSG ALFA DIESEL ENGINE POWERED




ALFA			GSG - P375	
------	--	--	------------	--

Standby Power	kVA	375	Engine Speed	Power Factor
	kW	300	1500 rpm	0,8 Cos Phi

Prime Power	kVA	350	Voltage	
	KW	280	400 / 230 V	


ENGINE	FUEL CONSUMPTION (lt/h)
--------	-------------------------

Brand	PERKINS	%110 ESP	74,6
Power PRP	302.4	%100 PRP	67,6
Model	1706A-E93TAG2	%75 PRP	51,2
N° of Cylinders / Valves	6/24	%50 PRP	34,2
Engine Type	4	(The specific gravity is 0.84 and the fuel is considered to be BS2869, Class A2.)	
Displacement	9,29		
Aspiration	Turbocharged - Air to air cooled		
Bore x Stroke	115x149		
Compression Ratio	16.5:1		
Air Filter	Heavy Duty		
Cooling Method	Water Cooled (water + %50 antifreeze)		
Total Coolant Capacity	35.8		
Governor Type	ECM (Engine Control Modul)		
Electrical System	24VDC		
Battery Charger Current	45A		
Oil Capacity	30		
Exhaust Gas Flow PRP	47,38		
Exhaust Gas Temp.	541.6		
Air Flow PRP	17.47		
Cooling Air Flow PRP	370		
Starter Power	8 kW		
Standard Battery Voltage	24VDC		
Standard Battery Capacity	2x75Ah		
Standard Battery Type	Maintenance-Free Lead Acid		

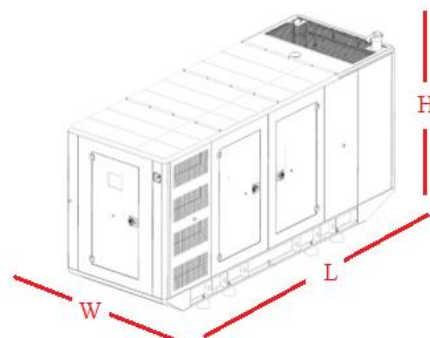


ALTERNATOR

Brand	LINZ
Model	PRO28M F/4
Voltage	400 /230 VAC
Number of Phase	3
Power Factor	0.8
Number of Poles	4
Connection Type	Star
Bearing	Single
Insulation Class	H
Protection Class	IP 23
Winding	2/3
Control System	Self Excited
Voltage Regulator	Electronic AVR
Efficiency 4/4 400VAC 50Hz	95.1
Voltage Regulation	±%1
THD	<%4
Apparent Power [kVA] Prime 400VAC 50Hz 125°C/40°C	350

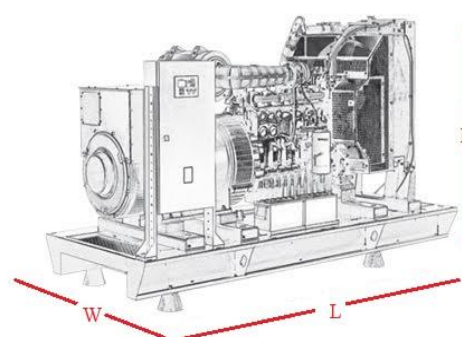

OPEN VERSION					CANOPY VERSION			
Width(mm)	Length(mm)	Height(mm)	Dry Weight (kg)	Fuel Tank Capacity (lt.)	Width(mm)	Length(mm)	Height(mm)	Dry Weight (kg)
1450	3450	1820	2915	780	1510	4370	2205	3310

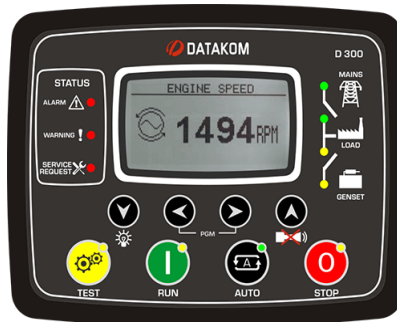

- * Diesel and gas genset support
- * 400Hz operation support
- * Downloadable languages
- * Harmonic analysis of V & I
- * Weekly operation schedule
- * Dual mutual standby with equal aging of gensets
- * Overload IDMT protection
- * Current unbalance protection
- * Fuel filling & fuel theft alarms
- * Battery back-up real time clock

- * Idle speed control
- * Contactor & MCB drive
- * Fuel filling counters
- * Fuel consumption counter
- * Automatic GSM geo-location
- * Reverse power protection
- * Free configuration program
- * Mobile genset support
- * 3 level configuration password
- * Ip65 rating with optional gasket



- * Full remote communications support (AirGate 2.0, WSV)
- * Internet access using Ethernet / 4G, Modbus TCP/RTU
SNMP v1/v2c
- * Active SMS and emails
- * Detailed history log with up to 350 records
- * Dual Mutual Standby application support
- * Remote display
- * User setpoints and protections
- * 5 languages in the controller & Translator functionality
- * User Access Management
- * Cyber security improvement
- * Alternative configurations
- * Multi-purpose schedulers
- * Modbus register mapping possibility

- * Stand-by and prime-power application in one unit
- * Backlit symbols
- * 8 binary outputs, 8 + 1 binary inputs, 4 analog inputs (U/I/R)
- * +5 V output reference for analog inputs
- * 2 high-current E-Stop binary outputs
- * USB Host
- * Inbuilt RS485
- * 2 slots for extension plug-in modules (Modbus, Internet,
SMS, inputs/outputs)
- * Extension CAN modules
- * ECU support (Tier 4 Final, Stage V)
- * RTC with battery back-up (full calendar)
- * Power over USB for controller configuration
- * Zero power mode
- * True RMS measurement
- * In-built PLC, complemented with a PLC monitoring tool in
InteliConfig
InteliConfig
- * Load shedding, dummy load management
- User buttons
- * User buttons
- * Geofencing based on GPS position
- * Available also in low temperature version (Order code: